arXiv:1209.0171v1 [physics.flu-dyn] 2 Sep 2012

On self-propulsion of N-sphere micro-robot

By V. A. Vladimirov

Dept of Mathematics, University of York, Heslington, York, YO10 5DD, UK

(Received 4 September 2012)

The aim of this paper is to describe the self-propulsion of a micro-robot (or micro-swimmer) consisting of N spheres moving along a fixed line. The spheres are linked to each other by arms with the lengths changing periodically. For the derivation, we use the asymptotic procedure containing the two-timing method and a distinguished limit. We show that in the main approximation, the self-propulsion velocity appears as a linear combination of velocities of all possible triplets of spheres. Velocities and efficiencies of three-, four-, and five-swimmers are calculated.

The paper is devoted to H.K.Moffatt, who initiated the author's interests in low-Reynolds-number fluid dynamics.

---

1. Introduction and formulation of problem

1.1. *Introduction*

The studies of micro-robots represent a flourishing modern research topic, which creates a fundamental base for modern applications in medicine and technology, see Purcell (1977), Becker *et.al.* (2003), Najafi & Golestanian (2004), Dreyfus *et.al.* (2005), Earl *et.al.* (2007), Chang *et.al.* (2007), Alouges *et.al.* (2008), Gilbert *at.al.* (2010), Golestanian & Ajdari (2008), Golestanian & Ajdari (2009), Alexander *et.al.* (2009), Leoni *et.al.* (2009), Lauga (2011). At the same time, the simplicity of both time-dependence and geometry represents the major advantage in the studies of micro-robots (in contrast with extreme complexity of self-swimming microorganisms, *e.g.* Pedley & Kessler (1987), Vladimirov *et.al.* (2004), Pedley (2009), Polin *et.al.* (2009)); which makes it possible to describe the motions of micro-robots in greater depth.

In this paper, we generalize the theory of a three-sphere micro-robot of Najafi & Golestanian (2004), Golestanian & Ajdari (2008) to an N-sphere micro-robot. We employ two-timing method and distinguished limit arguments, which lead to a simple and rigorous analytical procedure. Our calculation of the self-propulsion velocity of an N-sphere robot shows that it represents (in the main approximation) a linear combination of velocities due to all possible triplets of spheres. The velocities and Lighthill's swimming efficiencies of three-, four-, and five-sphere robots are calculated as examples. This paper represents further studies of a problem introduced in Vladimirov (2012a).

1.2. *Formulation of problem*

We consider a micro-robot consisting of N rigid spheres of radii R^*_i, $i = 1, 2, \dots N$ with their centers at the points $x^*_i(t^*)$ of x^*-axis ($x^*_{i+1} > x^*_i$), t^* is time, asterisks mark dimensional variables and parameters. The spheres are connected by $N-1$ arms/rods, such that the distances between the centres of neighbouring spheres are $l^*_\alpha = |x^*_{\alpha+1} - x^*_\alpha|$, $\alpha = 1, 2, \dots N-1$, see Fig.1 (in this paper latin subscripts change from 0 to N, while greek subscripts change from 0 to $N-1$). We accept Stokes's approximation where masses

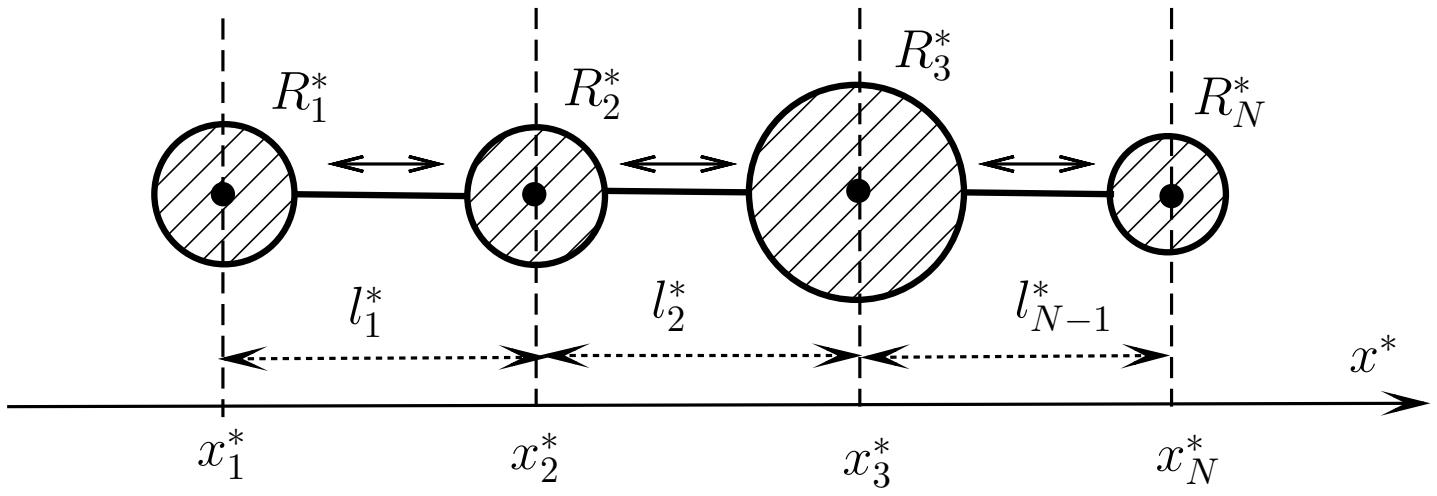

FIGURE 1. $N = 4$ spheres, linked by arms of periodically changing lengths.

of spheres and arms are zero; the arms are so thin (much thinner than any R_i^*) that their interactions with a fluid are negligible. The equations of motion can be written as

$$f_i^* + F_i^* = 0 \tag{1.1}$$

$$F_i^* = -\kappa_i^* \{\dot{x}_i^* - \sum_{k\neq i} 3R_k^* \dot{x}_k^*/(2x_{ik}^*)\}, \quad x_{ik}^* \equiv |x_i^* - x_k^*| \tag{1.2}$$

$$x_{\alpha+1}^* - x_\alpha^* = l_\alpha^* \tag{1.3}$$

$$\sum_{i=1}^N f_i^* = 0 \tag{1.4}$$

where $\kappa_i^* \equiv 6\pi\eta R_i^*$, η is viscosity, dots above the functions stand for d/dt^*, and summation convention over repeating subscripts is *not in use*. The forces f_i^* are exerted by the arms on the i-th sphere, while F_i^* represent viscous friction. In order to derive (1.2) we use a classical expression for Stokes's friction force as well as the explicit expression for fluid velocity for a moving along x^*-axis sphere. The x^*-component u^* of this velocity at distance r^* along x^*-axis is

$$u^* \simeq 3R^*U^*/(2r^*)$$

where R^* and U^* are the radius and velocity of a sphere, see Lamb (1932), Landau & Lifshitz (1959), Moffatt (1996). Equality (1.4) follows from the fact that the external forces exerted on each arm are negligible. The geometrical configuration of a micro-robot is determined by *given* functions

$$l_\alpha^* = L_\alpha^* + \widetilde{l}_\alpha^*(\tau) \tag{1.5}$$

where L_α^* are mean values and $\widetilde{l}_\alpha^*(\tau)$ are oscillations, which represent 2π-periodic functions of a dimensionless variable $\tau \equiv \omega^* t^*$; ω^* is a constant. Since all l_α^* are given, then conditions (1.3) can be considered as geometrical *constraints*. Equalities (1.1)-(1.5) represent the system of $2N$ equations for $2N$ unknown functions:

$$\boldsymbol{x}^*(t^*) \equiv (x_1^*(t^*), x_2^*(t^*), \ldots, x_N^*(t^*)), \quad \boldsymbol{f}^*(t^*) \equiv (f_1^*(t^*), f_2^*(t^*), \ldots, f_N^*(t^*))$$

These equations contain three characteristic lengths: distance L^* between the neighbouring spheres, radius R^* of spheres, and amplitude λ^* of arm oscillations; the characteristic time-scale is T^*:

$$R^* \equiv \sum_{i=1}^N R_i^*/N, \quad L^* \equiv \sum_{\alpha=1}^N L_\alpha^*/N, \quad \lambda^* \equiv \sum_{\alpha=1}^N \max \widetilde{l}_\alpha^*/N, \quad T^* \equiv 1/\omega^*$$

The dimension of κ^* can be eliminated from the equations by division of (1.1) by κ^*, hence it does not play any role in scaling. We choose dimensionless variables and small parameters as:

$$\boldsymbol{x}^* = L^*\boldsymbol{x}, \quad R_i^* = R^* R_i, \quad \widetilde{l}_\alpha^* = \lambda^* \widetilde{l}_\alpha, \quad t^* = T^* t, \quad f_i^* = 6\pi\eta R^* L^* f_i / T^*;$$
$$\varepsilon \equiv \lambda^*/L^* \ll 1, \quad \delta \equiv 3R^*/(2L^*) \ll 1$$

Then the dimensionless form of (1.1)-(1.5) is

$$R_i x_{it} - \delta \sum_{k\neq i} R_{ik} x_{kt}/l_{ik} = f_i, \quad l_{ik} = L_{ik} + \varepsilon \widetilde{l}_{ik} \tag{1.6}$$

$$x_{\alpha+1} - x_\alpha = l_\alpha \tag{1.7}$$

$$\sum_i f_i = \boldsymbol{f} \cdot \boldsymbol{I} = 0, \quad \boldsymbol{I} \equiv (1, 1, \dots, 1) \tag{1.8}$$

where $R_{ik} \equiv R_i R_k$, subscript t stands for d/dt,

$$l_{ik} \equiv \sum_{n=i}^{k-1} l_n, \quad \text{for} \quad k \geq i+1, \quad \text{with} \quad l_{ki} = l_{ik} \quad \text{otherwise}, \tag{1.9}$$

and similar definitions for L_{ik} and $\widetilde{l}_{ik}$ (for example, $L_{13} = L_1 + L_2$ *etc.*). Eqn.(1.6) can be rewritten as $(N \times N)$-matrix form:

$$\mathbb{A}\boldsymbol{x}_t = \boldsymbol{f} \quad \text{or} \quad \sum_{k=1}^{N} A_{ik} x_{kt} = f_i \tag{1.10}$$

$$\mathbb{A} = A_{ik} = \begin{cases} R_i & \text{for} \quad i = k, \\ -\delta R_{ik}/l_{ik} & \text{for} \quad i \neq k \end{cases} \tag{1.11}$$

2. Two-timing method and asymptotic procedure

2.1. *Functions and notations*

The following *dimensionless* notations and definitions are in use:
(i) s and τ denote slow time and fast time; subscripts τ and s stand for related partial derivatives.
(ii) A dimensionless function, say $G = G(s, \tau)$, belongs to class $\mathcal{I}$ if $G = O(1)$ and all partial s-, and τ-derivatives of G (required for our consideration) are also $O(1)$. In this paper all functions belong to class $\mathcal{I}$, while all small parameters appear as explicit multipliers.
(iii) We consider only *periodic in* τ *functions* $\{G \in \mathcal{P}: \quad G(s, \tau) = G(s, \tau + 2\pi)\}$, where s-dependence is not specified. Hence all considered below functions belong to $\mathcal{P} \bigcap \mathcal{I}$.
(iv) For arbitrary $G \in \mathcal{P}$ the *averaging operation* is:

$$\langle G \rangle \equiv \frac{1}{2\pi} \int_{\tau_0}^{\tau_0 + 2\pi} G(s, \tau)\, d\tau \equiv \overline{G}(s), \qquad \forall\ \tau_0 \tag{2.1}$$

(v) The *tilde-functions* (or purely oscillating functions) represent a special case of $\mathcal{P}$-functions with zero average $\langle \widetilde{G} \rangle = 0$. The *bar-functions* (or mean-functions) $\overline{G} = \overline{G}(s)$ do not depend on τ. A unique decomposition $G = \overline{G} + \widetilde{G}$ is valid.

2.2. *Asymptotic procedure*

The ε-dependence of l_{ik} (1.6) leads to the presentation of matrix $\mathbb{A}$ (1.11) as a series in ε

$$\mathbb{A}=\overline{\mathbb{B}}_0+\varepsilon\delta\widetilde{\mathbb{A}}'_0+\dots,\quad \overline{\mathbb{B}}_0\equiv\overline{\mathbb{A}}_0+\delta\overline{\mathbb{A}}_1 \tag{2.2}$$

$$\overline{\mathbb{A}}_0\equiv\operatorname{diag}\{R_1,R_2,...,R_N\},\quad \widetilde{\mathbb{A}}'_0\equiv\begin{cases}0 & \text{for } i=k,\\ R_{ik}\widetilde{l}_{ik}/L^2_{ik} & \text{for } i\neq k\end{cases}$$

where we do not present the expression for $\overline{\mathbb{A}}_1$ since it does not affect the final answer. In double series (with small parameters ε and δ) matrices $\overline{\mathbb{A}}_0$, $\overline{\mathbb{A}}_1$ and $\widetilde{\mathbb{A}}'_0$ appear in the terms of orders $\varepsilon^0\delta^0$, $\varepsilon^0\delta^1$, and $\varepsilon^1\delta^1$.

The introduction of fast time variable τ and slow time variable s represents the crucial step of our asymptotic procedure. We choose:

$$\tau=t,\qquad s=\varepsilon^2t$$

This choice can be justified by the same distinguished limit arguments as in Vladimirov (2012b). Here we present this choice without proof, however the most important part of this proof (that this choice leads to a valid asymptotic procedure) is exposed and exploited below. After the use of the chain rule

$$d/dt=\partial/\partial\tau+\varepsilon^2\partial/\partial s \tag{2.3}$$

we accept (temporarily) that τ and s represent two independent variables. The substitution of (2.3),(2.2) into (1.10) gives its two-timing form:

$$(\overline{\mathbb{B}}_0+\varepsilon\delta\widetilde{\mathbb{A}}'_0+\dots)(\boldsymbol{x}_\tau+\varepsilon^2\boldsymbol{x}_s)=\boldsymbol{f} \tag{2.4}$$

Unknown functions are taken as regular series

$$\boldsymbol{x}(\tau,s)=\overline{\boldsymbol{x}}_0(s)+\varepsilon\boldsymbol{x}_1(\tau,s)+\dots,\quad \boldsymbol{f}(\tau,s)=\boldsymbol{f}_0(\tau,s)+\varepsilon\boldsymbol{f}_1(\tau,s)+\dots \tag{2.5}$$

where $\widetilde{\boldsymbol{x}}_0\equiv 0$, which means that long distances of self-swimming are caused by small oscillations: $|\overline{\boldsymbol{x}}_0|\gg|\varepsilon\widetilde{\boldsymbol{x}}_1(\tau,s)|$.

2.3. *Successive approximations*

The successive approximations of (2.4),(2.5) yield:
Terms of order $\varepsilon^0=1$: $\boldsymbol{f}_0\equiv 0$;
Terms of order ε^1: $\overline{\mathbb{B}}_0\boldsymbol{x}_{0\tau}=\boldsymbol{f}_1$; its average gives $\overline{\boldsymbol{f}}_1\equiv 0$ and the oscillating part is

$$\overline{\mathbb{B}}_0\widetilde{\boldsymbol{x}}_{1\tau}=\widetilde{\boldsymbol{f}}_1; \tag{2.6}$$

Terms of order ε^2: $\overline{\mathbb{B}}_0\widetilde{\boldsymbol{x}}_{2\tau}+\delta\widetilde{\mathbb{A}}'_0\widetilde{\boldsymbol{x}}_{1\tau}+\overline{\mathbb{B}}_0\overline{\boldsymbol{x}}_{0s}=\boldsymbol{f}_2$; its averaged part is

$$\overline{\mathbb{B}}_0\overline{\boldsymbol{x}}_{0s}+\delta\langle\widetilde{\mathbb{A}}'_0\widetilde{\boldsymbol{x}}_{1\tau}\rangle=\overline{\boldsymbol{f}}_2 \tag{2.7}$$

Force $\overline{\boldsymbol{f}}_2$ can be excluded from (2.7),(1.8) as:

$$\boldsymbol{I}\cdot\overline{\mathbb{B}}_0\overline{\boldsymbol{x}}_{0s}+\delta\boldsymbol{I}\cdot\langle\widetilde{\mathbb{A}}'_0\widetilde{\boldsymbol{x}}_{1\tau}\rangle=0 \tag{2.8}$$

The averaged self-propulsion motion means that the rate of changing is $\overline{x}_{0is}=\overline{X}_{0s}$ with the same function $\overline{X}_0(s)$ for all spheres; therefore we write $\overline{\boldsymbol{x}}_{0s}=\overline{X}_{0s}\boldsymbol{I}$. Hence (2.8) gives

$$\overline{X}_{0s}=-\delta\frac{\boldsymbol{I}\cdot\langle\widetilde{\mathbb{A}}'_0\widetilde{\boldsymbol{x}}_{1\tau}\rangle}{\boldsymbol{I}\cdot\overline{\mathbb{A}}_0\boldsymbol{I}} \tag{2.9}$$

where in the denominator matrix $\overline{\mathbb{B}}_0$ is replaced with $\overline{\mathbb{A}}_0$, since we consider only the main (linear in δ) term in (2.9). Expression (2.9) still contains unknown functions $\widetilde{\boldsymbol{x}}_{1\tau}$ which can be determined from (2.6) with the use of constraints (1.7),(1.8). Indeed, equation (2.6) (with the terms required for linear in δ precision in (2.9)) gives:

$$\begin{gathered}\widetilde{\boldsymbol{x}}_{1\tau}=(\overline{\mathbb{A}}_0)^{-1}\widetilde{\boldsymbol{f}}_1\equiv\widetilde{\boldsymbol{g}},\quad \widetilde{\boldsymbol{g}}=(\widetilde{g}_1,\widetilde{g}_2,...,\widetilde{g}_N)\\ \widetilde{g}_i\equiv\widetilde{f}_{1i}/R_i,\quad (\overline{\mathbb{A}}_0)^{-1}=\operatorname{diag}\{1/R_1,1/R_2,\dots,1/R_N\}\end{gathered}\tag{2.10}$$

One can see that (2.10),(1.7) yield $\widetilde{x}_{\alpha+1,\tau}-\widetilde{x}_{\alpha,\tau}=\widetilde{g}_{\alpha+1}-\widetilde{g}_\alpha=\widetilde{l}_{\alpha\tau}$, while (1.8) leads to $\sum_i R_i\widetilde{g}_i=0$. Both restrictions can be written with the use of $N\times N$ constraint matrix $\mathbb{C}$:

$$\mathbb{C}\widetilde{\boldsymbol{g}}=\widetilde{\boldsymbol{l}}_\tau,\quad \mathbb{C}\equiv\begin{pmatrix}-1&1&0&\dots&0&0\\0&-1&1&\dots&0&0\\\dots&\dots&\dots&\dots&\dots&\dots\\0&0&0&\dots&-1&1\\R_1&R_2&R_3&\dots&R_{N-1}&R_N\end{pmatrix},\quad \widetilde{\boldsymbol{l}}\equiv\begin{pmatrix}\widetilde{l}_1\\\widetilde{l}_2\\\dots\\\widetilde{l}_{N-1}\\0\end{pmatrix}$$

The substitution of its inverse form

$$\widetilde{\boldsymbol{x}}_{1\tau}=\mathbb{C}^{-1}\widetilde{\boldsymbol{l}}_\tau\tag{2.11}$$

into (2.9) yields

$$\overline{X}_{0s}=-\frac{\delta}{\rho}\boldsymbol{I}\cdot\langle\widetilde{\mathbb{A}}'_0\mathbb{C}^{-1}\widetilde{\boldsymbol{l}}_\tau\rangle\tag{2.12}$$

where

$$(-1)^{N+1}\rho\mathbb{C}^{-1}\equiv\begin{pmatrix}\rho_1-\rho&\rho_2-\rho&\rho_3-\rho&\dots&\rho_{N-1}-\rho&1\\\rho_1&\rho_2-\rho&\rho_3-\rho&\dots&\rho_{N-1}-\rho&1\\\rho_1&\rho_2&\rho_3-\rho&\dots&\rho_{N-1}-\rho&1\\\dots&\dots&\dots&\dots&\dots&\dots\\\rho_1&\rho_2&\rho_3&\dots&\rho_{N-1}-\rho&1\\\rho_1&\rho_2&\rho_3&\dots&\rho_{N-1}&1\end{pmatrix}\tag{2.13}$$

$$\rho_k\equiv\sum_{i=1}^{k}R_i,\ k\geq1;\quad \rho\equiv\rho_N,\quad \boldsymbol{I}\cdot\overline{\mathbb{A}}_0\boldsymbol{I}=\rho$$

The expression for inverse matrix (2.13) can be checked by direct calculations of product $\mathbb{C}^{-1}\mathbb{C}$; these calculations become particularly simple if the matrix in the right hand side of (2.13) is decomposed into two matrices: one containing all ρ's, and another with identical rows $(\rho_1,\rho_2,\rho_3,\dots,\rho_{N-1},1)$. It is worth to emphasise that the presented analytic procedure is especially simple, since in order to calculate the self-propulsion velocity (2.9) one needs only to know the main approximation $\widetilde{\boldsymbol{x}}_1$ for mutual oscillations of spheres, while this approximation is completely described by simple equations (2.10),(2.11).

2.4. *Self-propulsion velocity*

One can see from (2.12) that $\overline{X}_{0s}=\boldsymbol{I}\cdot\overline{\boldsymbol{x}}_s/N=O(\delta)$. Hence the order of magnitude of dimensionless physical velocity is:

$$\overline{V}_0\equiv\boldsymbol{I}\cdot\overline{\boldsymbol{x}}_t/N=\varepsilon^2\overline{X}_{0s}=O(\varepsilon^2\delta)$$

The substitution of $\widetilde{\mathbb{A}}_0'$ (2.2) and $\mathbb{C}^{-1}$ (2.13) into (2.12) and subsequent algebraic transformations lead to

$$\overline{V}_0 = \frac{\varepsilon^2\delta}{\rho^2}\sum_{i<k<l}\overline{G}_{ikl} \tag{2.14}$$

$$\overline{G}_{ikl} \equiv 2R_iR_kR_l\left(\frac{1}{L_{ik}^2}+\frac{1}{L_{kl}^2}-\frac{1}{L_{il}^2}\right)\langle\widetilde{l}_{ik}\widetilde{l}_{kl\tau}\rangle \tag{2.15}$$

where the sum (2.14) is taken over all possible triplets $(i,k,l):\ 1\le i<k<l\le N$. In (2.15) one can also take $2\langle\widetilde{l}_{ik}\widetilde{l}_{kl\tau}\rangle = \langle\widetilde{l}_{ik}\widetilde{l}_{kl\tau} - \widetilde{l}_{ik\tau}\widetilde{l}_{kl}\rangle$, which can be proved by integration by parts. The formulae (2.14), (2.15) have been obtained for $N=3,4,5$ by explicit analytical calculations and for any N by the method of mathematical induction. These calculations are straightforward but rather cumbersome to be presented here. However, as soon as (2.14) and (2.15) are known, they can be verified by separate calculations of all terms proportional to $1/L_{ik}^2$ for each particular pair i,k. For example, for $i=1,k=2$ the relevant part of matrix $\widetilde{\mathbb{A}}_0'\equiv\widetilde{A}_{ik}'$ (2.2) contains only $\widetilde{A}_{12}'=\widetilde{A}_{21}'=R_{12}\widetilde{l}_1/L_{12}^2$, while all other components are zero. The related part of (2.12) can be easily calculated; it leads to the same expression as the corresponding extraction from (2.14),(2.15), which in this case contains only $(N-2)$ terms with $l=3,4,\dots,N$.

The number of terms/triplets in (2.14) rapidly increases with N: for a three-swimmer the sum (2.14) contains the only triplet, for a four-swimmer – four triplets, for a five-swimmer – 10 triplets, while for a ten-swimmer the number of triplets grows up to 120. In general (2.14) contains $N!/[(N-3)!3!]$ triplets. It is important to emphasise that (2.14) contains *all triplets* in a micro-robot, not only triplets of the neighbouring spheres. If one takes into account only the triplets of the neighbouring spheres (say, (1,2,3) and (2,3,4) out of $(1,2,3),(1,2,4),(1,3,4),(2,3,4)$ for $N=4$), then they give only the rough estimation of $\overline{V}_0$, which can be misleading since different correlations $\langle\widetilde{l}_\alpha\widetilde{l}_{\beta\tau}\rangle$ can have different values (see below).

Function $\overline{G}_{123}$ (2.15) has been introduced by Golestanian & Ajdari (2008) and studied by Alexander *et.al.* (2009), Alouges *et.al.* (2008), Golestanian & Ajdari (2009) in the context of a three-sphere micro-robot. We call $\overline{G}_{ikl}$ *a Golestanian function.* Formulae (2.12),(2.14),(2.15) give the main result of this paper: the self-swimming velocity of an N-sphere micro-robot represents a linear combination of Golestanian functions for all available triplets.

2.5. *Examples of homogeneous micro-robots: power, velocity, and efficiency*

The explicit formulae (2.14), (2.15) can be used to obtain physically interesting results (optimal strokes, required power, related forces, efficiency, *etc.*) for various N-sphere swimmers. We briefly address some of these questions below. In all these examples, we consider only homogeneous micro-robots, consisting of equal spheres $R_i=1$ and of equal upstretched arms $L_\alpha=1$.

The scalar product of the main equation (1.6) and $\boldsymbol{x}_t$ leads to the average power of a micro-robot

$$\overline{\mathcal{P}}\equiv\langle\boldsymbol{f}\cdot\boldsymbol{x}_t\rangle=\varepsilon^2\langle\widetilde{\boldsymbol{x}}_{1\tau}^2\rangle+O(\varepsilon^2\delta)$$

where we have taken into account that $\boldsymbol{x}_t=\varepsilon\widetilde{\boldsymbol{x}}_{1\tau}+O(\varepsilon^2)$, which follows from (2.5) and (2.3). Another expression $\overline{\mathcal{P}}_s=\rho\overline{V}_0^2$ represents the power, which is required to drag a micro-robot with velocity $\overline{V}_0$ in the absence of its oscillations (when the main approximation for the dimensionless Stokes's friction force is $-\rho\overline{V}_0$). Lighthill's swimming efficiency (see Becker *et.al.* (2003)) is the ratio $\mathcal{E} \equiv \overline{\mathcal{P}}_s/\overline{\mathcal{P}}$, which in our case is

$$\mathcal{E} \simeq \frac{\varepsilon^2\delta^2}{\rho^3}\frac{\left(\sum_{i<k<l}\overline{G}_{ikl}\right)^2}{\langle\widetilde{\boldsymbol{x}}_{1\tau}^2\rangle} \tag{2.16}$$

where $\widetilde{\boldsymbol{x}}_{1\tau}$ is determined by (2.11).

For ***a three-swimmer***, eqns.(2.14),(2.15) yield:

$$\overline{V}_0 = \frac{\varepsilon^2\delta}{9}\overline{G}_{123}, \quad \overline{G}_{123} = \frac{7}{2}\langle\widetilde{l}_1\widetilde{l}_{2\tau}\rangle \tag{2.17}$$

Further simplification can be achieved if we accept that oscillations of both arms are harmonic and have equal amplitudes

$$l_\alpha = \cos(\tau + \varphi_\alpha), \quad \text{then} \quad 2\langle\widetilde{l}_1\widetilde{l}_{2\tau}\rangle = \sin(\varphi_1 - \varphi_2) \tag{2.18}$$

with constant phases $0 \le \varphi_\alpha \le 2\pi$. Substitution of (2.18) into (2.17) and (2.16) gives

$$\overline{V}_0 = \varepsilon^2\delta\frac{7}{36}\sin\phi, \quad \mathcal{E} = \left(\frac{7\varepsilon\delta}{12}\right)^2\frac{\sin^2\phi}{2+\cos\phi}, \quad \phi \equiv \varphi_1 - \varphi_1$$

which shows that their maxima take place at different ϕ:

$$\begin{aligned} &\max\overline{V}_0 \simeq 0.19\varepsilon^2\delta \text{ at } \phi = \pi/2 \simeq 1.57 \\ &\max\mathcal{E} = 0.182\varepsilon^2\delta^2 \text{ at } \phi = 1.80 \end{aligned} \tag{2.19}$$

Similar consideration for ***a four-swimmer*** yields

$$\overline{V}_0 = \frac{\varepsilon^2\delta}{16}(\overline{G}_{123} + \overline{G}_{124} + \overline{G}_{134} + \overline{G}_{234})$$

which (with the use of (2.18)) leads to

$$\overline{V}_0 = \varepsilon^2\delta\frac{7}{64}\mathcal{S}_4(\phi,\psi), \quad \mathcal{S}_4(\phi,\psi) \equiv (1+C)(\sin\phi + \sin\psi) + 2C\sin(\phi+\psi)$$

where $C = 41/63 \simeq 0.65$, $\phi \equiv \varphi_1 - \varphi_2$, and $\psi \equiv \varphi_2 - \varphi_3$. Then (2.16) can be expressed as:

$$\mathcal{E} = \left(\frac{7\varepsilon\delta}{16}\right)^2\frac{\mathcal{S}_4^2(\phi,\psi)}{5 + 2\cos\phi + 2\cos\psi + \cos(\phi+\psi)}$$

The computations show that:

$$\begin{aligned} &\max\overline{V}_0 \simeq 0.44\varepsilon^2\delta \text{ at } \phi \simeq \psi \simeq 1.10 \\ &\max\mathcal{E} \simeq 0.55\varepsilon^2\delta^2 \text{ at } \phi \simeq \psi \simeq 1.38 \end{aligned} \tag{2.20}$$

For ***a five-swimmer***, one can write

$$\overline{V}_0 = \frac{\varepsilon^2\delta}{25}(\overline{G}_{123} + \overline{G}_{124} + \overline{G}_{125} + \overline{G}_{134} + \overline{G}_{135} + \overline{G}_{145} + \overline{G}_{234} + \overline{G}_{235} + \overline{G}_{245} + \overline{G}_{345})$$

which leads to:

$$\begin{aligned} &\overline{V}_0 = \frac{\varepsilon^2\delta}{50}\mathcal{S}_5, \quad \mathcal{S}_5 \equiv (4a+b+c)(\sin\phi + \sin\chi) + (5a+2b)\sin\psi + \\ &(a+2b+c)[\sin(\phi+\psi) + \sin(\psi+\chi)] + (a+2c)\sin(\phi+\psi+\chi); \\ &a = 7/8,\ b = 41/18,\ c = 151/72; \quad \phi \equiv \varphi_1 - \varphi_2,\ \psi \equiv \varphi_2 - \varphi_3,\ \chi \equiv \varphi_3 - \varphi_4 \end{aligned}$$

Then (2.16) takes form:

$$\mathcal{E}=\left(\frac{\varepsilon\delta}{10}\right)^2\frac{\mathcal{S}_5^2}{\mathcal{P}_5},\quad \mathcal{P}_5\equiv 10+3\cos\phi+4\cos\psi+3\cos\chi+ \tag{2.21}$$
$$2\cos(\phi+\psi)+2\cos(\psi+\chi)+\cos(\phi+\psi+\chi)$$

The computations give:

$$\max\overline{V}_0\simeq 0.77\varepsilon^2\delta \text{ at } \phi\simeq\chi\simeq 0.86,\ \psi\simeq 0.83 \tag{2.22}$$
$$\max\mathcal{E}\simeq 1.00\varepsilon^2\delta^2 \text{ at } \phi\simeq\chi\simeq 1.14,\ \psi\simeq 1.08$$

The numerical results (2.19)-(2.22) show that both $\max\overline{V}_0$ and $\max\mathcal{E}$ grow when N increases. For reasonably small values of parameters (say, $\varepsilon\simeq 0.2$ and $\delta\simeq 0.2$) we have $\max\mathcal{E}\sim 0.1\%$, hence the efficiency of considered micro-robots is low.

In order to compare the velocities of micro-robots and micro-organisms we use the dimensional variables, in which $\max\overline{V}_0^*\sim\omega^*L^*\varepsilon^2\delta$; it shows that (for typical stroke frequency of self-swimming microorganisms, which is about several Hz, see Pedley & Kessler (1987), Pedley (2009), Polin *et.al.* (2009), Vladimirov *et.al.* (2004)) a micro-robot can move itself with the rate about 10% percents of its own size per second. This estimation is $20\div 40$ times lower than a similar value for natural micro-swimmers, see Vladimirov *et.al.* (2004); it shows again low efficiency of considered micro-robots. If we suggest that the function $\max\overline{V}_0(N)$ grows with a similar rate (as it has been calculated for $N=3,4,5$), then micro-robots with $N=8\div 10$ could swim with a speed, similar to that of micro-organisms.

3. Discussion

1. Our approach (based on the two-timing method and a distinguished limit) is technically different from all previous methods employed in the studies of micro-robots. The possibility to derive explicit formulae for an N-sphere micro-robot shows its strength and analytical simplicity. The used version of the two-timing method has been developed in Vladimirov (2005), Vladimirov (2008), Vladimirov (2012b).

2. One can see that $\overline{V}_0=O(\varepsilon^2\delta)$ (2.14), which is the same as the result by Golestanian & Ajdari (2008), Golestanian & Ajdari (2009) for a three-sphere swimmer. At the same time our choice of slow time $s=\varepsilon^2 t$ (2.3) agrees with classical studies of self-propulsion for low Reynolds numbers, see Taylor (1951), Blake (1971), Childress (1981), as well as geometric studies of Shapere & Wilczek (1989).

3. The 'triplet' structure of a formula for self-propulsion velocity (2.14) can be expected without any calculations, on the base of the result for $N=3$. Indeed, if we are interested in the main term of the order $\varepsilon^2\delta$, then only triple interactions can be taken into account, as they have been described by Golestanian & Ajdari (2008). For example, the interactions between four spheres produce a term of the next order $O(\varepsilon^3\delta)$ in $\overline{V}_0$, where the multiplier ε^3 appears from the motion of three arms involved.

4. In our examples, all arms move harmonically (2.18); it does not provide the maximum of $\overline{V}_0$. For example, for a three-sphere robot $\overline{V}_0\sim\langle\widetilde{l}_1\widetilde{l}_{2\tau}\rangle$ (2.17). Since $\widetilde{l}_1$ and $\widetilde{l}_{2\tau}$ represent mutually independent 2π-periodic in τ functions, it is clear that the maximum of this correlation appears when these functions coincide or proportional to each other. If $\max\langle\widetilde{l}_1\widetilde{l}_{2\tau}\rangle$ is calculated under the constraint of fixed amplitudes (which is natural for realistic experimental devices of variable arm lengths), then one can find that the theoretical maximum of this correlation is $2/\pi$, which is higher than $1/2$ for harmonic oscillations (2.18). Such an improvement will increase with the growth of N. In particu-

lar, non-harmonic periodic $\widetilde{l}_\alpha(\tau)$, providing the optimal strokes, have been discovered in computational studies of four-sphere micro-robots by Alexander *et.al.* (2009).

5. In our study we build an asymptotic procedure with two small parameters: $\varepsilon \to 0$ and $\delta \to 0$. Such a setting usually requires the consideration of different asymptotic paths on the plane (ε, δ) when, say $\delta = \delta(\varepsilon)$. In our case we can avoid such consideration, since small parameters appear (in the main order) as a product $\varepsilon^2\delta$.

6. The mathematical justification of the presented results by the estimation of an error in the original equation can be performed similar to Vladimirov (2010), Vladimirov (2011). One can also derive the higher approximations of $\overline{V}_0$, as it has been done by Vladimirov (2010), Vladimirov (2011) for different cases. The higher approximations can be useful for the studies of motion with $\overline{V}_0 \equiv 0$ (say, if all correlations involved in (2.14) are zero).

7. In the literature quoted in *Introduction* one can find interesting discussions about the physical mechanism of self-propulsion of micro-robots. A clear illustration of this mechanism is given by Avron *et.al.* (2005). At the same time one can notice that the self-propulsion of deformable bodies in inviscid fluid represents a classical topic, see *e.g.* Saffman (1967), Kanso & Newton (2009). It is interesting to note that the qualitative explanations of self-propulsion in an inviscid fluid and in self-propulsion in creeping flow can be seen as the same if one replaces the term *virtual mass* (for an inviscid fluid) to *viscous drag* (for creeping flows).

The author is grateful to Profs. A.D.Gilbert, R.Golestanian, K.I. Ilin, H.K.Moffatt, and J. Pitchford for useful discussions.

REFERENCES

Alexander, G. P., Pooley, C. M., and Yeomans, J.M. 2009 Hydrodynamics of linked sphere model swimmers. *J. Phys.: Condens. Matter*, **21**, 204108.

Alouges, F., DeSimone, A., and Lefebvre, A. 2008 Optimal strokes for low Reynolds number swimmers: an example. *J. Nonlinear Sci.*, **18**, 277-302.

Avron, J.E., Kenneth, O., and Oaknin, D.H. 2005 Pushmepullyou: an efficient microswimmer. *New J. of Physics*, **7**, 234.

Becker, D. J., Koelher, C. M., Ryder, and Stone, J.M. 2003 On self-propulsion of micromachimes al low Reynolds number: Purcell's three-link swimmer. *J. Fluid Mech.*, **490**, 15-35.

Blake, J. R. 1971 Infinite models for ciliary propulsion. *J. Fluid Mech.*, **49**, 209-227.

Chang, S.T., Paunov, V.N., Petsev, D.N., and Orlin, D.V. 2007 Remotely powered self-propelling particles and micropumps based on miniature diodes. *Nature Materials*, **6**, 235-240.

Childress, S. 1981 *Mechanics of swimming and flying.* Cambridge, CUP.

Dreyfus , R., Baudry, J., Roper, M.L., Fermigier, M., Stone, H.A. and Bibette, J. 2005 Microscopic artificial swimmers. *Nature*, **437**, 6, 862-865.

Earl, D. J., Pooley, C. M., Ryder, J.F., Bredberg, I. and Yeomans, J.M. 2007 Modelling microscopic swimmers at low Reynolds number. *J. Chem. Phys.*, **126**, 064703.

Gilbert, A. D., Ogrin, F. Y., Petrov, P.G., and Wimlove, C.P. 2010 Theory of ferromagnetic microswimmers. *Q.Jl Mech. Appl. Math.*, **64**, 3, 239-263.

Golestanian, R. and Ajdari, A. 2008 Analytic results for the three-sphere swimmer at low Reynolds number. *Phys.Rev.E*, **77**, 036308.

Golestanian, R. and Ajdari, A. 2009 Stochastic low Reynolds number swimmers. *J. Phys.: Condens. Matter*, **21**, 204104.

Kanso, E. and Newton, P.K. 2009 Passive locomotion via normal-mode coupling in a submerged spring-mass system. *J. Fluid Mech.*, **641**, 205-215.

Landau, L.D. and Lifshitz, E.M. 1959 *Fluid Mechanics.* Oxford, Butterworth-Heinemann.

Lamb, H. 1932 *Hydrodynamics.* Sixth edition, Cambridge, CUP.

Lauga, E. 2011 Life around the scallop theorem. *Soft Matter*, **7**, 3060-3065.

Leoni, M., Kotar, J., Bassetti, B., Cicuta, P. and Lagomarsino, M.C. 2009 A basic swimmer at low Reynolds number. *Soft Matter*, **5**, 472-476.

Moffatt, H. K. 1996 *Dynamique des Fluides, Tome 1, Microhydrodynamics.* Ecole Polytechnique, Palaiseau.

Najafi, A. and Golestanian, R. 2004 Simple swimmer at low Reynolds number: three linked spheres. *Phys.Rev.E*, **69**, 062901.

Pedley, T.J. and Kessler, J.O. 1987 The orientation of spheroidal microorganisms swimming in a flow field. *Proc. R. Soc. Lond.*, B**231**, 47-70.

Pedley, T.J. 2009 Biomechanics of aquatic micro-organisms. *New trends in fluid mechanics research*, **1**, 1-6.

Polin, M., Tuval, I., Dresher, K., Gollub, J. P. and Goldstein, R.E. 2009 *Chlamydomonas* swims with two gears in a eukaryotic version of run-and-tumble locomotion. *Science*, **325**, 487-490.

Purcell, E.M. 1977 Life at low Reynolds number. *Amer. J. of Phys.*, **45**, 1, 3-11.

Saffman, P.G. 1967 The self-propulsion of a deformable body in a perfect fluid. *J. Fluid Mech.*, **28**, 2, 385-389.

Shapere, A. and Wilczek, F. 1989 Efficiencies of self-propulsion at low Reynolds number. *J. Fluid Mech.*, **198**, 587-599.

Taylor, G. I. 1951, Analysis of the swimming of microscopic organisms. *Proc. R. Soc. Lond.*, **A209**, 447-461.

Vladimirov, V.A., Wu, M.S., Pedley, T.J., Denissenko, P.V. and Zakhidova S.G. 2004 Measurements of cell velocity distributions in populations of motile algae. *J. Exp. Biol.*, **207**, 1203-1216.

Vladimirov, V.A. 2005 Vibrodynamics of pendulum and submerged solid. *J. of Math. Fluid Mech.* **7**, S397-412.

Vladimirov, V.A. 2008 Viscous flows in a half-space caused by tangential vibrations on its boundary. *Studies in Appl. Math.*, **121**, 4, 337-367.

Vladimirov, V.A. 2010 Admixture and drift in oscillating fluid flows. E-print: *ArXiv*: 1009.4085v1, (physics,flu-dyn).

Vladimirov, V.A. 2011 Theory of Non-Degenerate Oscillatory Flows. E-print: *ArXiv*: 1110.3633v2, (physics,flu-dyn).

Vladimirov, V.A., 2012a Self-propulsion velocity of N-sphere micro-robot. *ArXiv*: 1206.0890v1, (physics,flu-dyn).

Vladimirov, V.A. 2012b Magnetohydrodynamic drift equations: from Langmuir circulations to magnetohydrodynamic dynamo? *J. Fluid Mech.* **698**, 51-61.